

Spatial Filtering

الجامعة السورية الخاصة
SYRIAN PRIVATE UNIVERSITY

Fundamentals of Spatial Filtering

$$g(x, y) = \sum_{s=-a}^a \sum_{t=-b}^b w(s, t) f(x + s, y + t)$$

Image size : $M \times N$

Masque size : $m \times n$

$$m = 2a + 1, n = 2b + 1$$

The Correlation of a filter $w(x, y)$ with an image $f(x, y)$

$$w(x, y) \star f(x, y) = \sum_{s=-a}^a \sum_{t=-b}^b w(s, t) f(x + s, y + t)$$

Common Types of Noise

- ▶ Salt & pepper noise
 - ▶ Random occurrences of black and white pixels
- ▶ Impulse noise
 - ▶ Random occurrences of white pixels
- ▶ Gaussian noise
 - ▶ Variations in intensity drawn from a Gaussian (“Normal”) distribution.
- ▶ *Basic Assumption*
 - ▶ *Noise is i.i.d. (independent & identically distributed)*



Original



Salt and pepper noise




Impulse noise



Gaussian noise

$$g(x, y) = w(-1, -1)f(x - 1, y - 1) + w(-1, 0)f(x - 1, y) + \dots \\ + w(0, 0)f(x, y) + \dots + w(1, 1)f(x + 1, y + 1)$$

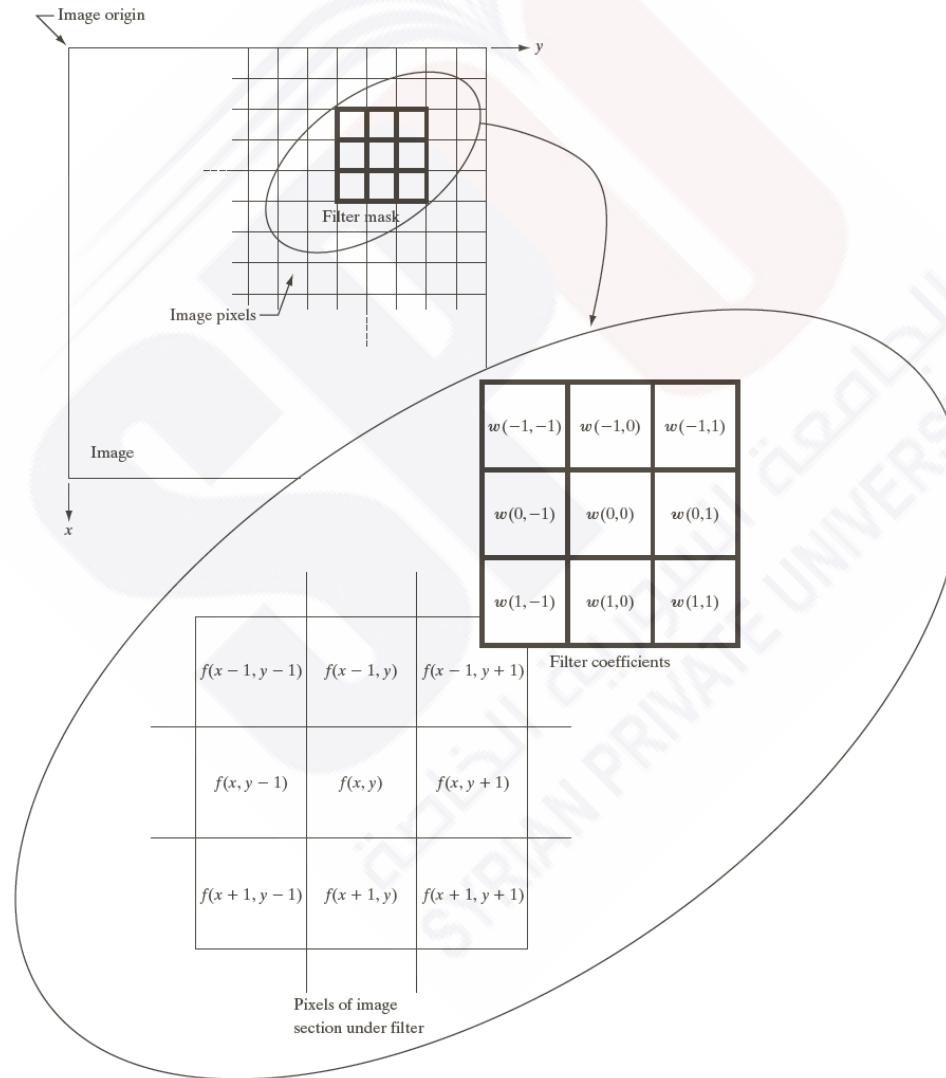

Correlation Filtering



$$G[i, j] = \sum_{u=-k}^k \sum_{v=-k}^k H[u, v] F[i + u, j + v]$$

- ▶ This is called cross-correlation, denoted

$$G = H \otimes F$$

- ▶ Filtering an image

- ▶ Replace each pixel by a weighted combination of its neighbors.
- ▶ The filter “kernel” or “mask” is the prescription for the weights in the linear combination.

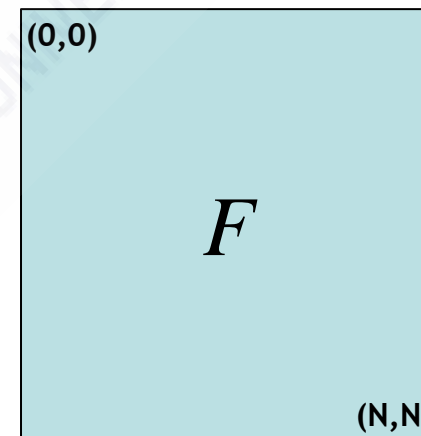


Smoothing linear filters

$$\frac{1}{9} \times \begin{array}{|c|c|c|} \hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline \end{array} \quad \frac{1}{16} \times \begin{array}{|c|c|c|} \hline 1 & 2 & 1 \\ \hline 2 & 4 & 2 \\ \hline 1 & 2 & 1 \\ \hline \end{array}$$

Averaging Filter

- ▶ What values belong in the kernel $H[u, v]$ for the moving average example?

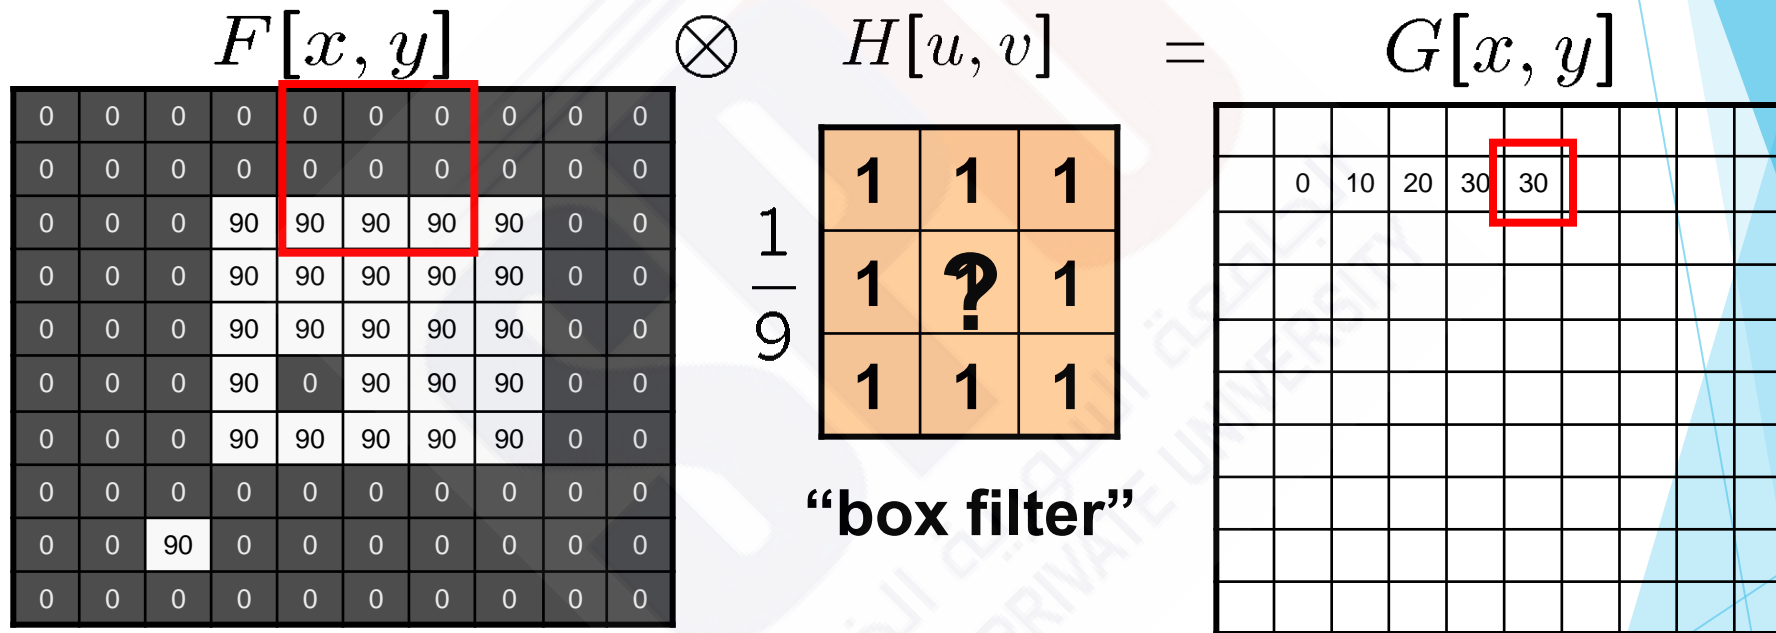

$$G = H \otimes F$$

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0								

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0	10							

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0	10	20						

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0	10	20	30					

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0	10	20	30	30				

Moving Average in 2D

$F[x, y]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

$G[x, y]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0	30	60	90	90	90	60	30	
	0	30	50	80	80	90	60	30	
	0	30	50	80	80	90	60	30	
	0	20	30	50	50	60	40	20	
	10	20	30	30	30	30	20	10	
	10	10	10	0	0	0	0	0	

Non-Linear Filters: Median Filter

- ▶ Basic idea

- ▶ Replace each pixel by the median of its neighbors.

- ▶ Properties

- ▶ Doesn't introduce new pixel values
- ▶ Removes spikes: good for impulse, salt & pepper noise
- ▶ Linear?

ar operator

10	15	20
23	90	27
33	31	30

Median value

10 15 20 23 27 30 31 33 90


↓ Sort

10	15	20
23	27	27
33	31	30



↓ Replace

Median Filter

Salt and pepper noise

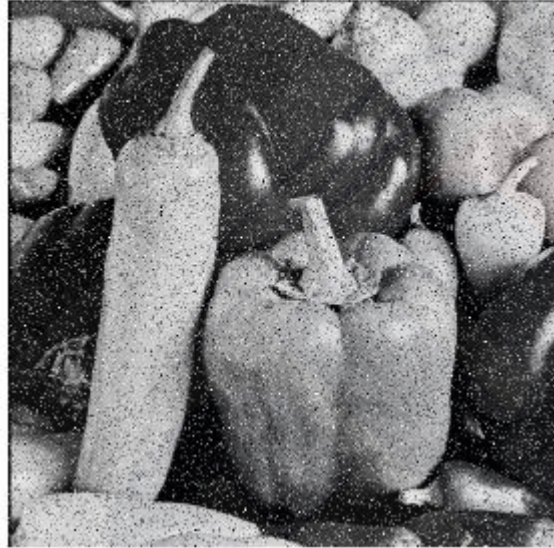


Median filtered

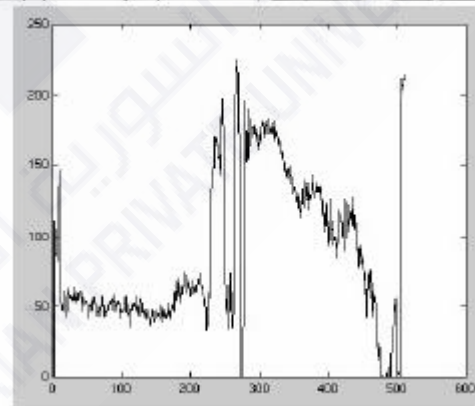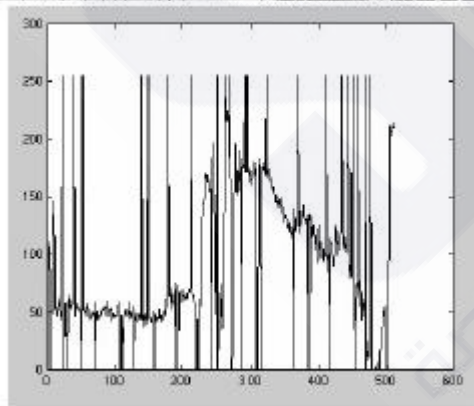

Plots of a row of the image

Median Filter


- ▶ The Median filter is edge preserving.

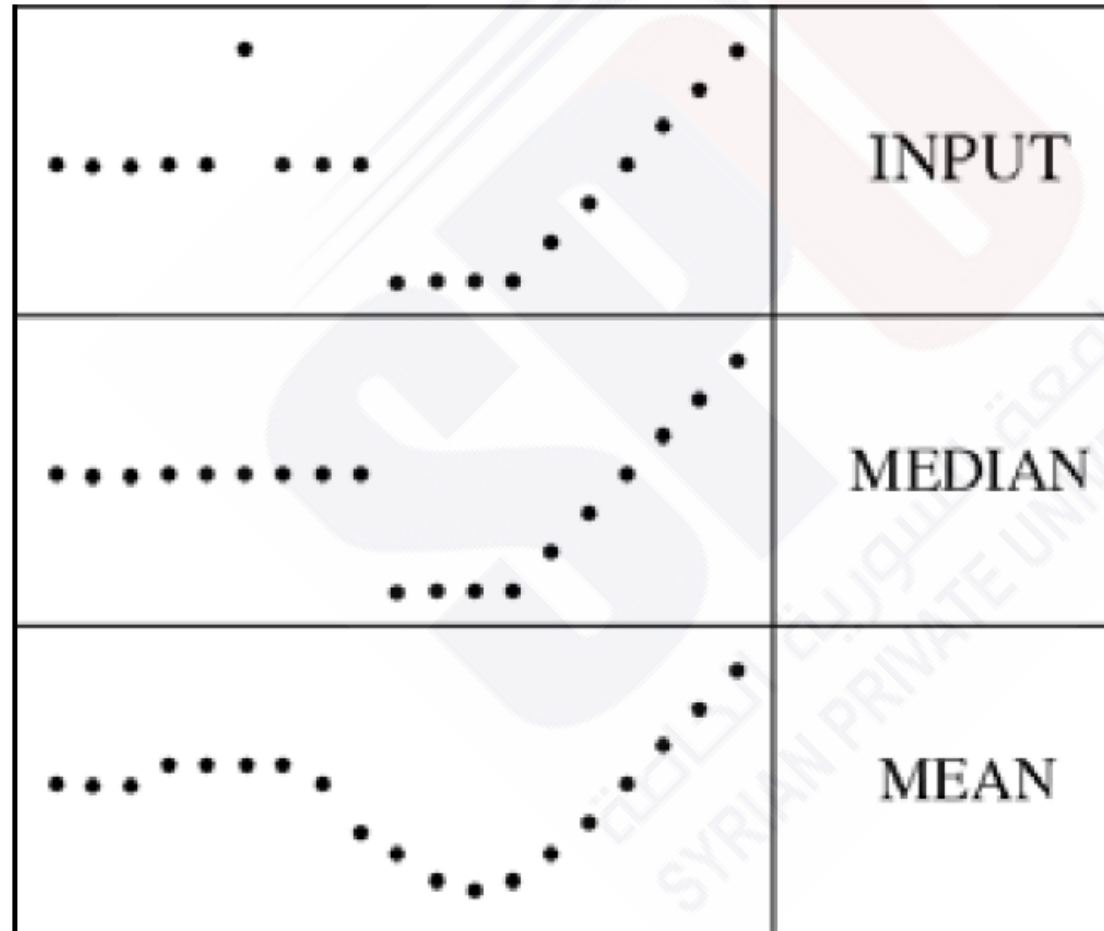

Nonlinear filters *median filters, max filter, min filter*

(10, 20, 20, 20, 15, 20, 20, 25, 100).

(10, 15, 20, 20, 20, 20, 20, 25, 100)

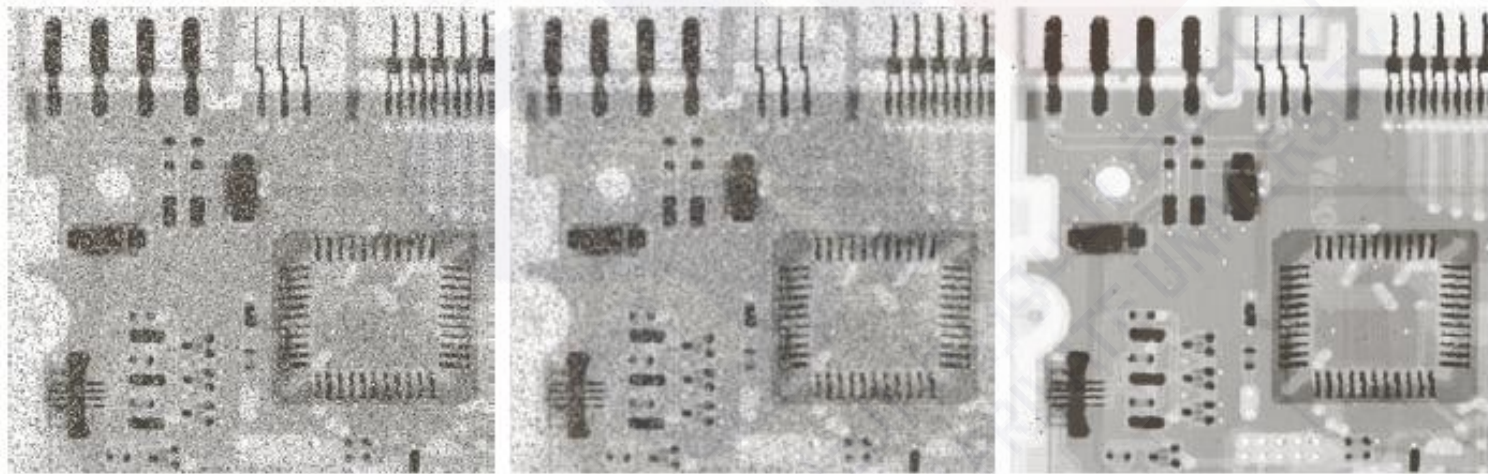

a b c

FIGURE 3.35 (a) X-ray image of circuit board corrupted by salt-and-pepper noise. (b) Noise reduction with a 3×3 averaging mask. (c) Noise reduction with a 3×3 median filter. (Original image courtesy of Mr. Joseph E. Pascente, Lixi, Inc.)